

BNG-DIP


Type dust explosion-proof flexible connecting pipe (DIPA20)



Application

- Can be used in hazardous areas: Zone 20、Zone 21 and Zone 22.
- Can be used in explosive or flammable dust atmosphere.

Model implication

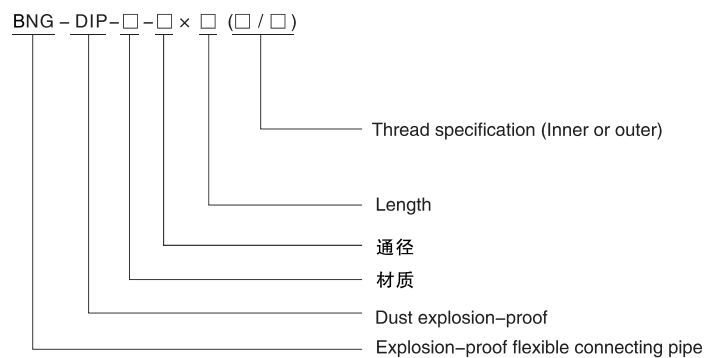

Main technical parameters

- Implementing the standard : GB 12476.1
- Explosion-proof mark: DIPA20TA

BNG-DIP

Type dust explosion-proof flexible connecting pipe (DIPA20)

Type	Inward diameter	Connecting thread	Length	Min bend radius
BNG-DIP-□-15 × 700	15	1 / 2	700	80
BNG-DIP-□-15 × 1000	15	1 / 2	1000	80
BNG-DIP-□-20 × 700	20	3 / 4	700	110
BNG-DIP-□-20 × 1000	20	3 / 4	1000	110
BNG-DIP-□-25 × 700	25	1	700	145
BNG-DIP-□-25 × 1000	25	1	1000	145
BNG-DIP-□-32 × 700	32	1 1 / 4	700	180
BNG-DIP-□-32 × 1000	32	1 1 / 4	1000	180
BNG-DIP-□-40 × 700	40	1 1 / 2	700	210
BNG-DIP-□-40 × 1000	40	1 1 / 2	1000	210
BNG-DIP-□-50 × 700	50	2	700	252
BNG-DIP-□-50 × 1000	50	2	1000	252
BNG-DIP-□-70 × 700	70	2 1 / 2	700	350
BNG-DIP-□-70 × 1000	70	2 1 / 2	1000	350
BNG-DIP-□-80 × 700	80	3	700	400
BNG-DIP-□-80 × 1000	80	3	1000	400
BNG-DIP-□-100 × 700	100	4	700	500
BNG-DIP-□-100 × 1000	100	4	1000	500